



IN-LINE STRAINER BASKETS

For UV Systems

HEADWORKS
BIOLOGY
SEPARATION
MEMBRANE
▶ **DISINFECTION**
BIOSOLIDS
SYSTEMS




UV

SAFETY

SPA

SWIMMING POOL

▶ Ancillary Products

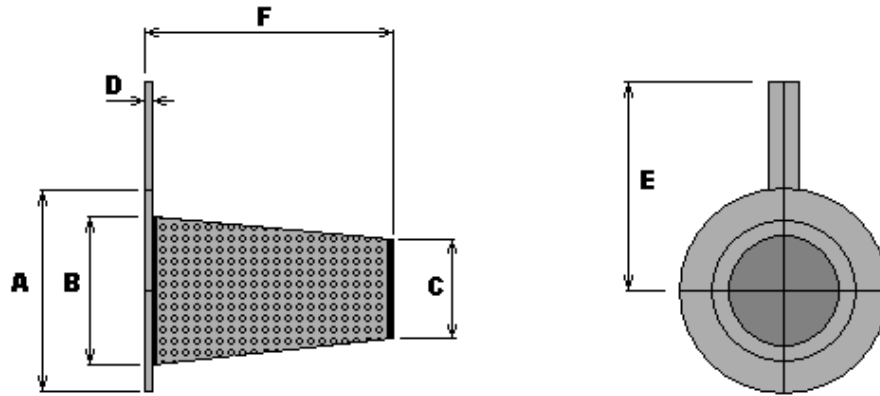

STRAINER MODEL REF	DIMENSIONS (mm)						IN-OUT (inches)
	A	B	C	D	E	F	
STR3	130	67	50	3	155	91	3
STR6	216	139	101	3	198	168	6
STR8	272	181	142	3	226	218	8
STR10	333	228	184	3	257	257	10
STR12	383	276	225	3	282	307	12
STR14	443	320	257	3	312	333	14

FLOWRATE M3/HR	STRAINERMODEL REF	PRESSURE DROP (PSI)
45	STR3	0.41
90	STR6	0.22
125	STR6	0.29
210	STR8	0.57
300	STR8	1.43
400	STR10	1.00
600	STR12	1.15
750	STR12	1.73
1000	STR14	1.98

316 SS STAINLESS STEEL CONSTRUCTION WITH 40 MESH RATING
THE ABOVE PRESSURE DROP VALUES ARE ESTIMATES FOR CLEAN STRAINERS
DEVELOPMENT IS CONTINUOUS AND SPECIFICATIONS ARE SUBJECT TO ALTERATION AT ANY TIME WITHOUT
NOTIFICATION